
Single axle utility (galvanized) – GDB



Trailer size	Trailer code	Deck length	Deck width	Deck height	GVWR	Payload capacity	Trailer weight
5' X 10'	GU2	10'	5'	21"	3,000 LBS	2,115 LBS	885 LBS
6' x 10'	GU4	10'	6'	21"	3,000 LBS	1,985 LBS	1,015 LBS
6′ X 12′	GU5	12'	6'	21"	3,000 LBS	1,875 LBS	1,125 LBS

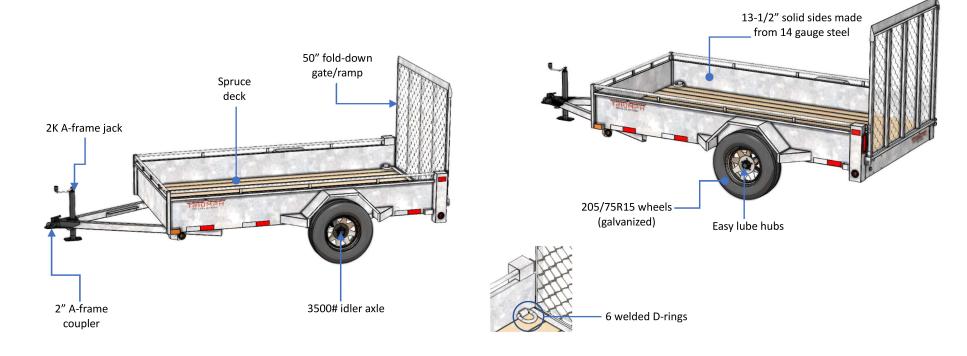

Additional information:

- Wire harness is sealed to provide greater protection for wiring
- Wire harness includes 4-way flat plug
- LED lighting (lifetime warranty)

Hot Dip Galvanizing Process

First, the product is dipped in acidic solu-tion and rinsed with cold water to remove the grease, dirt, rust and scale. It is then dipped in a flux solution to remove the last traces of oxide and to wet the steel. When the clean iron is then dipped into a molten zinc solution (typically at 450°C), it forms zinc-iron layers by a metallurgical reaction between the iron and zinc.

Dealer Contact Information

