


# B series dump trailers – GBD/HBD



Trailer size	Trailer code	Deck length	Deck width	Deck height	GVWR	Payload capacity	Trailer weight
7' X 14'	GD7.1	14'	7'	26"	14,000 LBS	9,950 LBS	4,050 LBS

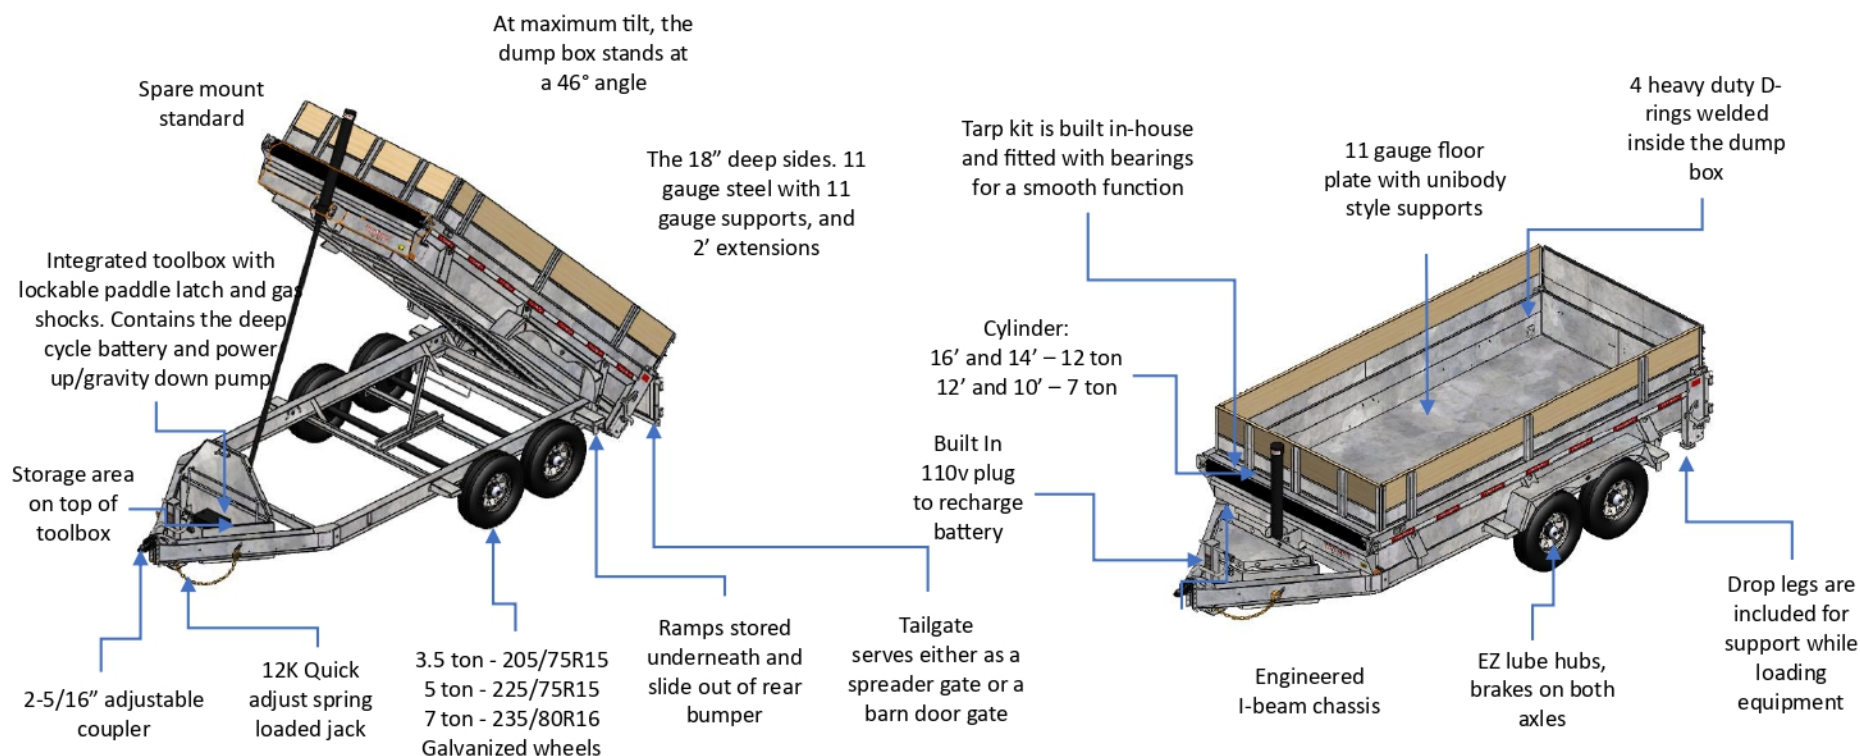

## Additional options:

- Spare tire
- Ramps
- 3" eye adjustable pintle ring (25,000 LBS capacity)
- Hydraulic jack
- Side extensions
- 14 ply tire upgrade

## Additional information:

- Hinge pins are zinc plated
- All hinges and pins are equipped with grease fittings
- LED lighting (lifetime warranty)
- Hot dip galvanizing offers greater protection and prevents the formation of rust

## Hot Dip Galvanizing Process

First, the product is dipped in acidic solution and rinsed with cold water to remove the grease, dirt, rust and scale. It is then dipped in a flux solution to remove the last traces of oxide and to wet the steel. When the clean iron is then dipped into a molten zinc solution (typically at 450°C), it forms zinc-iron layers by a metallurgical reaction between the iron and zinc.

## Dealer Contact Information

Work phone: 810 346-2835  
Email: [Benstrailersales@benssupercenter.com](mailto:Benstrailersales@benssupercenter.com)  
Website: [www.Bensgreatlakessales.com](http://www.Bensgreatlakessales.com)  
Location:

